


# FROST

While Frost-clad exterior wall sights the silent azure sky, beams of soft sunlight are touching the texture peacefully, elegant gray glowing in a quiet manner. For a moment, it reminds you of walking barefoot on the beach, where sea and sky embrace in the distance; you unexpectedly feel a gray-white shell at your foot. It rings warmly with mysterious tranquility for which one's heart yearns for, and which the wall with Frost shares. Both under the blue dome of heaven are expecting a drizzle which Frost will dance with around the building, quiet and steady.

**INVITAC**  
Module Model

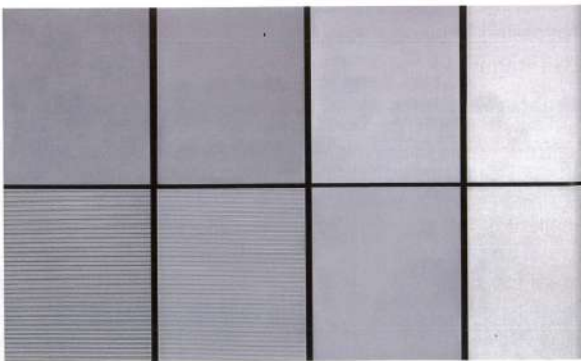

## LINEAR PERFORMANCE WARRANTY



Glass	Heat Strengthened Glass
Junction Box	IP68 Rated
Output Cables	TUV 1x4.0 mm <sup>2</sup> Customized Length
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0 ~ ±3 %
Temperature Coefficients of Pmax	-0.35 %/°C
Temperature Coefficients of Voc	-0.29 %/°C
Temperature Coefficients of Isc	0.048 %/°C
Nominal Operating Cell Temperature (NOCT)	45±2 °C
CTM	64-86 %



Thickened Double-Layer Tempered Glass



High Impact Resistance



50% Increased High Mechanical Performance Modules



Optimized Soundproofing Insulation

### Higher Aesthetics

Inherent advantages of integration in module design, better appearance without metal wire exposition.

### Higher Power Efficiency

Higher-density cell arrangement can put more cells per unit area and achieve higher module efficiency, meet the requirements for energy-saving buildings.

### Building Integrated Higher Safety

Double layers of tempered glass to meet the requirements of building safety, with fireproofing, better wind load, heat resistance and frost resistance. Be used as building unit for integrated installation.

